EDISON
LIGHTING SUPPLY

DATE: LOCATION:

TYPE: PROJECT:

CATALOG #:

T-Lite Series
LED TROFFER LIGHT

DESCRIPTION

5-Wattages + 5-CCT (35/40/50/57/65K), Damp Rated, 130lm/W, Dimmable+Smart



Intertek RoHS DLC LISTED PREMIUM 0-10V Dimming CCT Selectable WATTAGE Selectable 5 YEARS

PRODUCT FEATURES

- Constructed of one-piece ribbed unitized housing and corners that interlock, preventing damage to luminaire. All sides and corners are turned in and hemmed, removing sharp edges for safe handling and installation.
- Built with the highest quality driver that is Universal Voltage (120V-277Vac).
- Designed to reduce glare and improve light distribution through precision formed.
- 0-10V Continuous Dimming.
- Tunable 5-CCT (3500K, 4000K, 5000K, 5700K, 6500K).
- Tunable 5-Wattages.
- Operatingtemperatures -4°F to 113°F (-20°C to 45°C).
- DLC Premium listed. ETL certified to meet US and Canadian standards. FCC and RoHS compliant.
- 5 years exclusive limited warranty.

ORDERING INFORMATION

Order Code	DLC Product ID	Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Dimensions
_	_	NC-TR14-M50W-CCT	1x4	(15W, 20W, 25W, 30W, 40W)	120-277V	0.15A@120V,0.08A@277V 0.19A@120V,0.10A@277V 0.22A@120V,0.10A@277V 0.26A@120V,0.12A@277V 0.33A@120V,0.15A@277V	1950 2600 3250 3750 5000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.72"L x 11.93"W x 1.82"H
010422	S-9Q9R20	NC-TR22-M40W-CCT	2x2	(15W, 20W, 25W, 30W, 40W)	120-277V	0.14A@120V,0.08A@277V 0.18A@120V,0.09A@277V 0.21A@120V,0.10A@277V 0.25A@120V,0.11A@277V 0.33A@120V,0.15A@277V	1950 2600 3250 3750 5000	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	23.74"L x 23.74"W x 1.97"H
010424	S-N7KLKF	NC-TR24-M50W-CCT	2x4	(25W, 30W, 35W, 40W, 50W)	120-277V	0.21A@120V,0.10A@277V 0.24A@120V,0.11A@277V 0.28A@120V,0.13A@277V 0.34A@120V,0.15A@277V 0.43A@120V,0.19A@277V	3250 3900 4550 5000 6250	125-130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	47.72"L x 23.74"W x 1.97"H

T-Lite Series
LED TROFFER LIGHT

ACCESSORIES(SOLD SEPARATELY)



Emergency LED Driver


EMERGENCY

EM9 [INSTALLED] Emergency LED Driver, 9W, 90-Min Battery

EM15 [INSTALLED] Emergency LED Driver, 15W, 90-Min Battery

DIMENSIONS

Unit: mm/inch

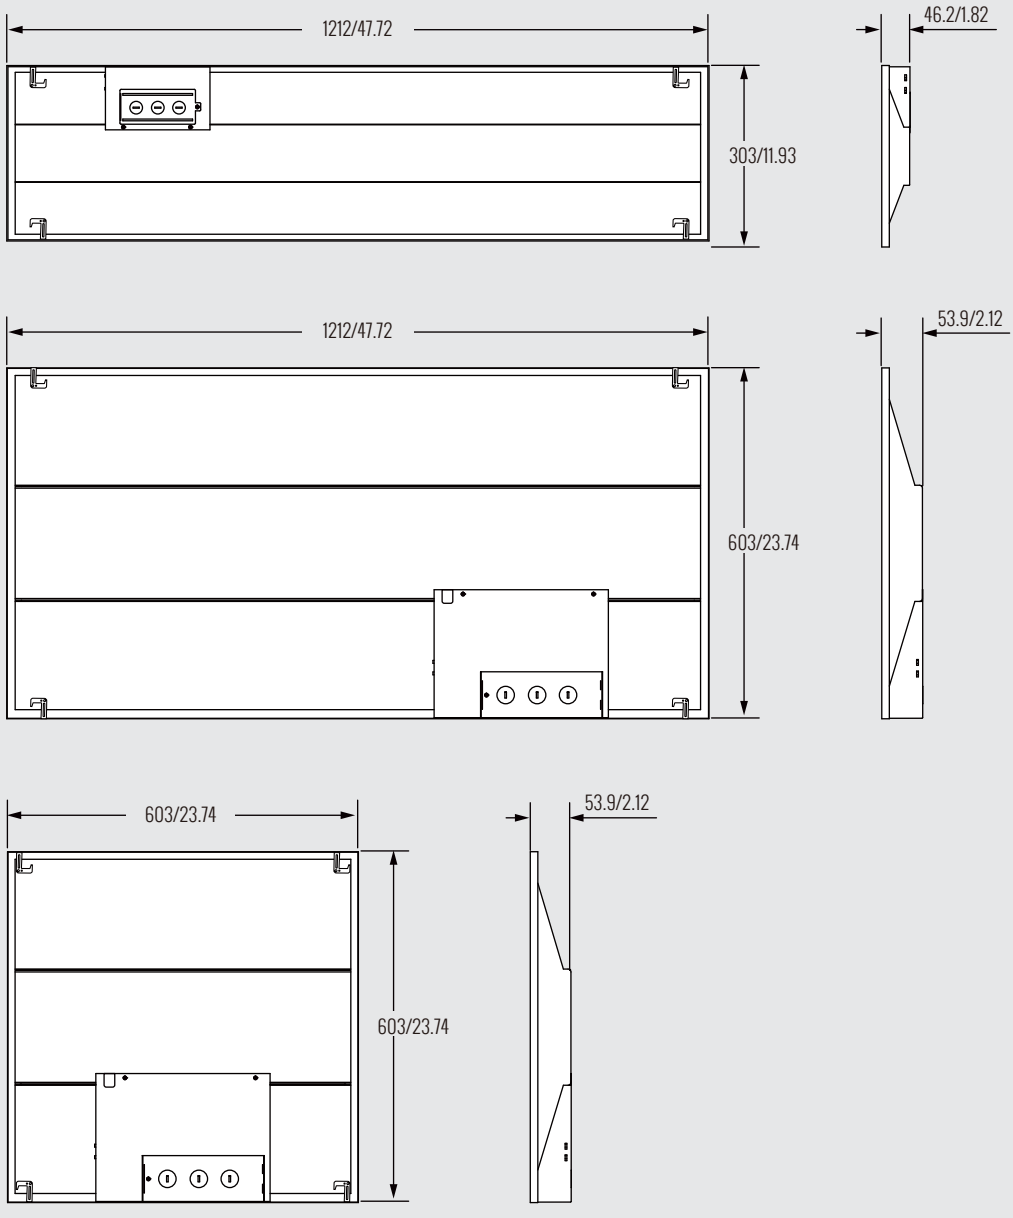

Dimensional tolerances: (+1.5mm, -1.0mm)


T-Lite Series
LED TROFFER LIGHT


PHOTOMETRIC DATA

Polar Curve


Cone Chart


1x4

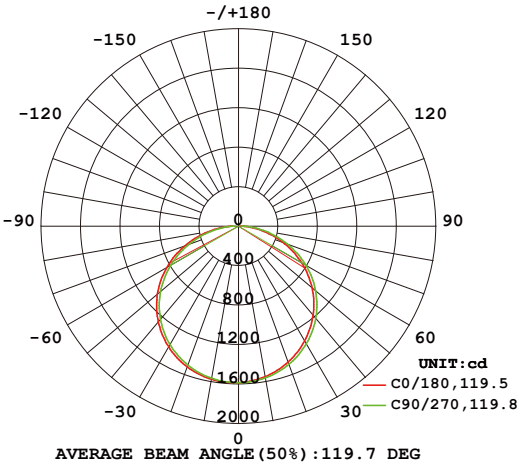

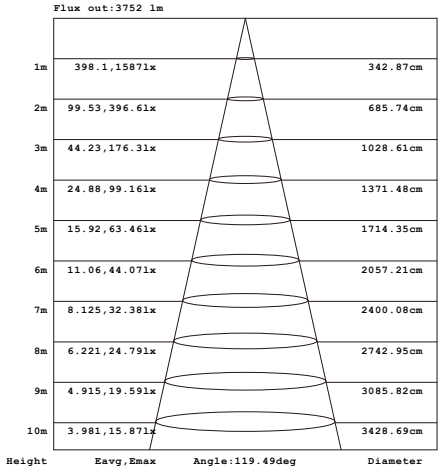

2x2

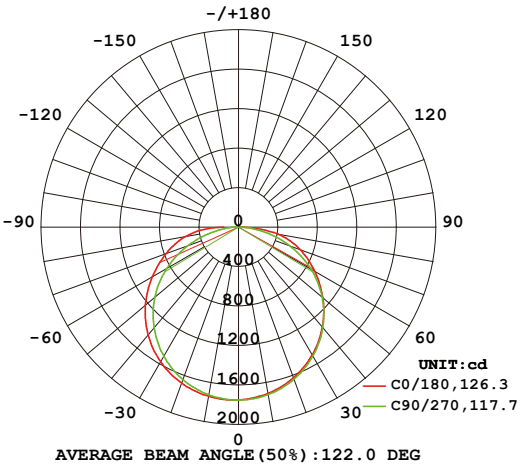

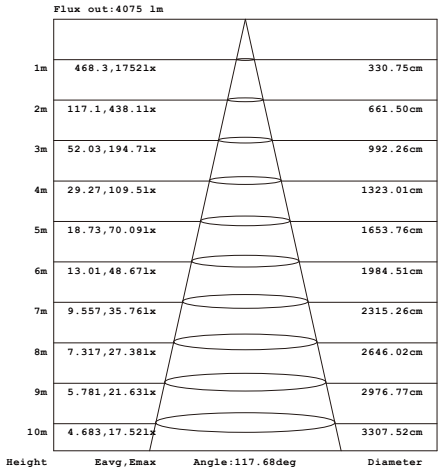

2x4

